

# STYWALL AD PRO

## UNDER-WALL ACOUSTIC INSULATION

HIGH DENSITY UNDER WALL STRIP MADE OF ROLL WITH TEARPROOF SUPPORT, CONSISTING OF SBR RUBBER GRANULES



### ■ TECHNICAL SPECIFICATION

Acoustic insulation in stripes 6 mm thick made of SBR (Stirene Butadiene Rubber) fibres and granules rubber hot pressed with a polyurethane binder to a 50 g/m<sup>2</sup> non-woven, unstretched backing. Density 780 kg/m<sup>3</sup>. Stripes dimensions: m 8 lenght, cm 10, 15, 20, 25, 33 width.



### ■ CERTIFIED ACOUSTIC IMPROVEMENT

Our under wall strip improves acoustic performances of vertical and horizontal structures

### ■ FLEXIBILITY

Made in different widths, it easily adapts to design needs

### ■ LAYING COSTS REDUCTION

The roll strip ensures fast installation; the presence of the tearproof support protects and gives greater stability and mechanical strength

### ■ TO BE USED WITH

Ideal for under brick partition walls, under housing partition walls and under wood or plasterboard walls

### ■ TECHNICAL DATA

Thickness	6 mm
Length	8,0 m
Width	10-15-20-25-33 cm
Density	780 kg/m <sup>3</sup>


Dynamic stiffness s'	77 MN/m <sup>3</sup>
Compressibility c	0,2 mm
Reaction to fire	E
Thermal conductivity coefficient λ	0,12 W/m K

# STYWALL AD PRO

## UNDER-WALL ACOUSTIC INSULATION

### INSTALLATION INSTRUCTIONS FOR UNDER-WALL STRIP STYWALL AD PRO

**1** Lay the under wall strip

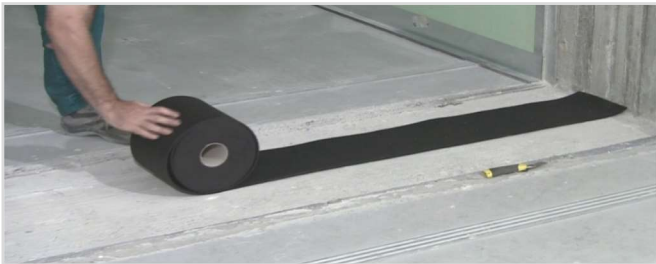

**2** Over the Stywall, lay down a plaster bed in order to start to built up the wall




### PHYSICAL AND MECHANICAL CHARACTERISTICS OF THE PRODUCT

#### ■ TECHNICAL CHARACTERISTICS


Thickness	EN 12431	mm	6	± 1
Length	EN 822	m	8,0	± 2%
Width	EN 822	cm	10-15-20-25-33	± 0,5
Density	EN 1602	kg/m <sup>2</sup>	780	± 5%
Creep deformation at time Xct - 10 years	EN 1606	mm	0,13	
Strain at time $\epsilon_t$ - 10 years	EN 1606		5,9%	

#### ■ COMPRESSION BEHAVIOR

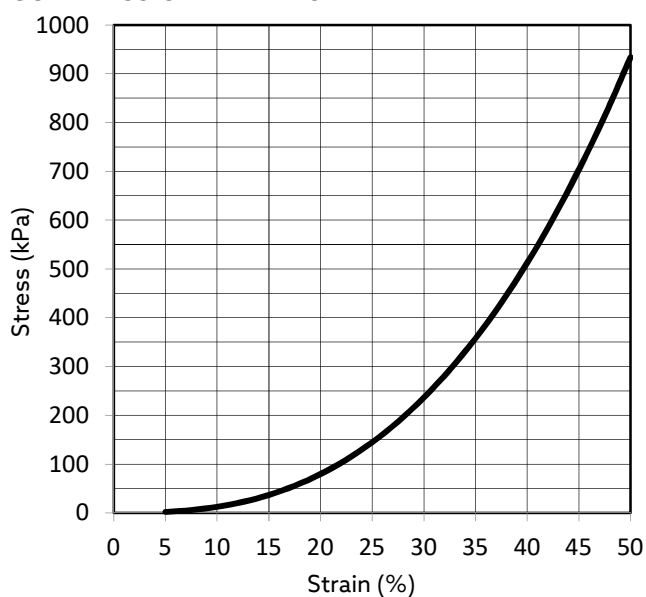

Stress at 10%	$\sigma_{20}$
EN 826	kPa $\geq 80 \pm 5\%$

#### ■ THICKNESS AND COMPRESSIBILITY

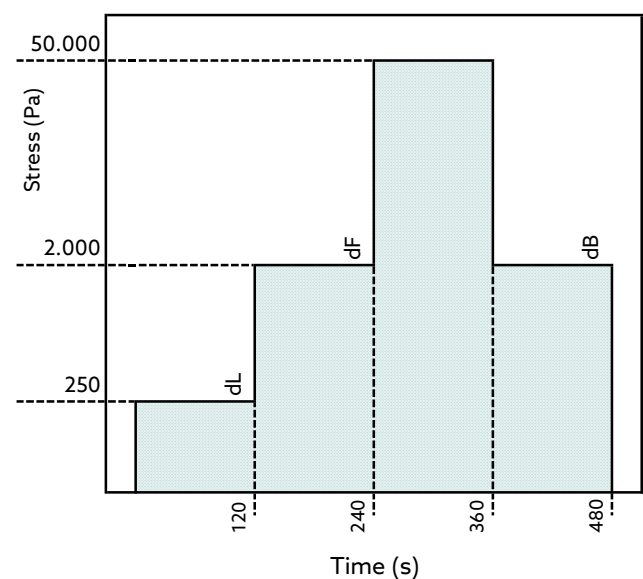

Thickness	dL	dF	dB
EN 12431	mm 6,6	6,4	6,4 ± 10%

